

Removable Bollards (RM)


with closed base

RM275-600/ RM275-800



Product description		
Removable Bollards (RM)	RM275-600	RM275-800
Height	600 mm	800 mm
Diameter	273 mm	
Material thickness	4 mm	
Movable cylinder	Steel S235JR Stainless steel (AISI 304)	
Surface treatment	Steel version: anti-corrosion treatment – standard painting* Stainless steel version: standard painting* or brushed	
Weight	22 kg	28 kg
Reflecting strips (height 55 mm)	Yes	
Impact energy without destruction - impact resistance	40,000 J	
Impact energy with destruction - breakout resistance	200,000 J	
Load rating acc. to EN 124	C250 Regulation	
Temperature range	From -40°C to +70°C	

* For orders with no surcharge in RAL to choose, the standard colour is Anthracite grey.

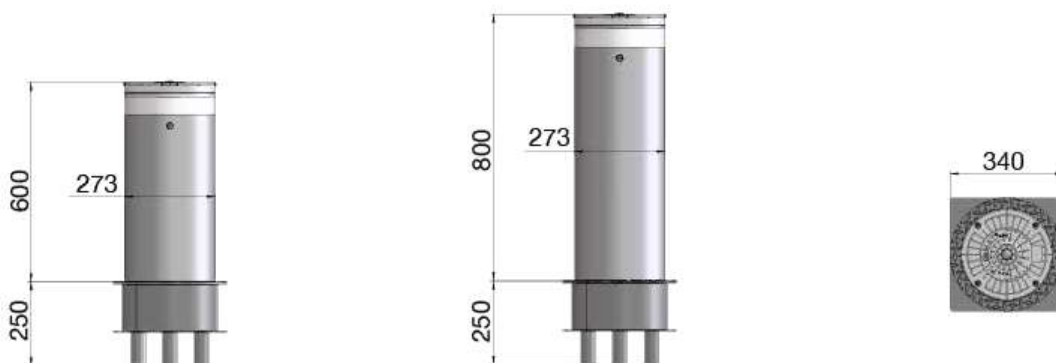

RM275-600 / RM275-800 with closed base		RM275-600	RM275-800
		Article no.	Article no.
Removable bollard RM275-600/RM275-800 + Profile half cylinder lock with 2 keys	Steel painted	PQ301064	PQ301084
	Stainless steel painted	PQ307064	PQ307084
	Stainless steel brushed	PQ313064	PQ313084
Ground fitting for RM275 made of painted steel, with round bottom plate			AA301251
Surcharge to have the same lock and keys for more bollards	Surcharge per bollard		AA107761
Optional extras for removable bollards		Article no.	
Surcharge for painting the cylinder in RAL to choose	Cylinder 275-600	AA900601	
	Cylinder 275-800	AA900631	
Protection against corrosion - marine treatment - for steel cylinders (recommended for saline ambient conditions)	Cylinder 275-600	AA103991	
	Cylinder 275-800	AA104011	
Protection against corrosion - marine treatment - for basement (recommended for saline ambient conditions)		AA108601	
Additional key for profile half cylinders		AA107751	
Kit to modify the bollard for inclined road		AA107591	
Project inclination required (if not available)		AA107601	