

# Removable bollards RM


with base

RM275/K12-900 / RM275/M50-1200



Product description			
	RM275/K12-900	RM275/M50-1200	
Removable cylinder	Height	900 mm	1200 mm
	Diameter	271 mm	271 mm
	Material thickness	23 mm	23 mm
	Material	Steel S355JR Stainless steel (AISI 304)/(AISI 316)	
	Cylinder weight	199 kg	243 kg
	Surface treatment	Steel version: anti-corrosion treatment – standard painting* Stainless steel version: standard painting* or brushed	
	Reflecting strips (height 55 mm)	Yes	
Impact energy without destruction - impact resistance	250,000 J		
Impact energy with destruction - breakout resistance	2,000,000 J		
Security lock	Yes – profile half cylinder lock incl. 2 keys		
Conforming with	PAS68, IWA14, ASTM M50 (K12)	-	
Load rating acc. to EN 124	D400 Regulation		

\* For orders with no surcharge in RAL to choose, the standard colour is Anthracite grey.

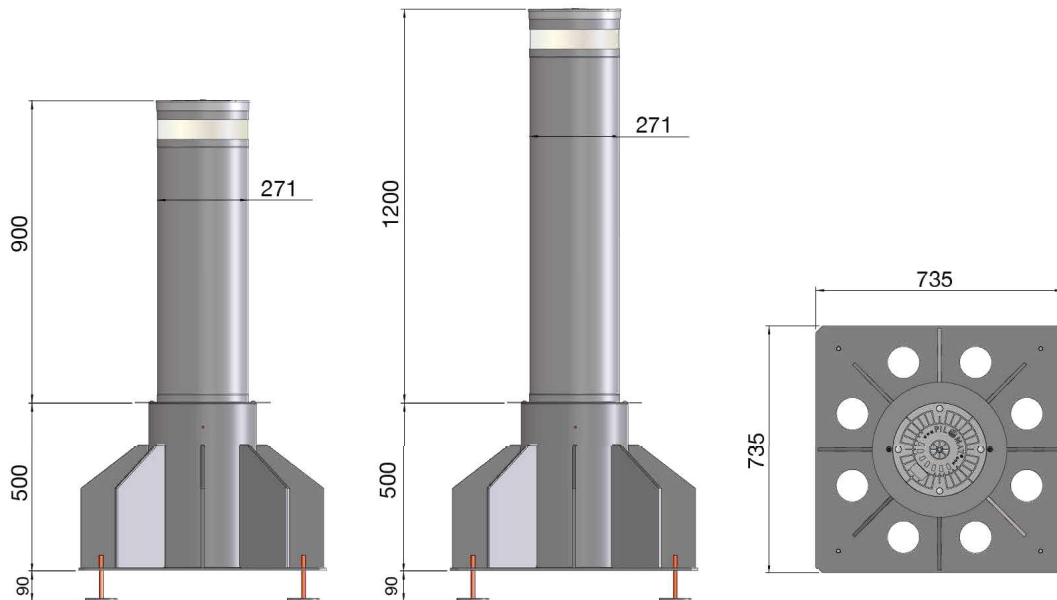

# Removable bollards RM

with base

RM275/K12-900 / RM275/M50-1200



RM275/K12-900 / RM275/M50-1200		RM275/K12-900	RM275/M50-1200
		Article no.	Article no.
Removable bollard RM275/ K12-900 / RM275/M50-1200	Steel painted	PQ301094	PQ301024
+ Lock with profile half cylinder, including 2 keys	Stainless steel painted	PQ307094	PQ307024
	Stainless steel brushed	PQ313094	PQ313024
Removable bollard RM275/ K12-900 / RM275/M50-1200	Steel painted	PQ301095	PQ301025
+ Lock with profile half cylinder, including 2 keys	Stainless steel painted	PQ307095	PQ307025
+ Lighting strips with 25 LEDs *	Stainless steel brushed	PQ313095	PQ313025
Ground fitting for without LED made of painted steel, with round bottom plate			AA107421
Ground fitting for with LED made of painted steel, with round bottom plate			AA107431
Surcharge to have the same lock and keys for more bollards		Surcharge per bollard	AA107761
* For removable bollards with LED lighting strips, an additional cylinder cover (head) for base (article no. AA107521) must also be ordered.			
Optional extras for removable bollards			Article no.
Surcharge for painting the cylinder in RAL to choose			AA900871
Surcharge for cylinder version in stainless steel brushed (AISI 316)			
			Cylinder 275-900 AA104131
			Cylinder 275-1200 AA104161
Protection against corrosion - marine treatment - for ground fitting (recommended for saline ambient conditions)			AA108021
Protection against corrosion - marine treatment - for removable bollards (recommended for saline ambient conditions)			
			Cylinder 275-900 AA101851
			Cylinder 275-1200 AA106851
LED lighting strip power supply for semi-automatic / fixed bollards (max. 8)			AA107341
LED lighting strips line extension (80 m max.), supplied in 5 m increments			Per m AA107551
Cylinder cover (head) and reflecting strip (no logo)			difference AA108811
Additional cylinder cover (head) for base			AA107521
Rectangular bottom plate, steel			AA107531
Rectangular bottom plate, stainless steel			AA108091
Additional key for removable bollard			AA107751
Kit to modify the bollard 275 K4/M30/K12/M50 for inclined road			AA108151
Project inclination required (if not available)			AA108161